

10/526865

PCT/IB 03/03818

Rec'd PCT/PTO 04 MAR 2005

IB03/03818

INVESTOR IN PEOPLE

#2



REC'D 19 SEP 2003

WIPO PCT

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 6 June 2003


BEST AVAILABLE COPY

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Patents Form 1/77

Patents Act 1977
Rule 16)

Request for grant of a patent
See notes on the back of this form. You can
also get an explanatory leaflet from the Patent
Office to help you fill in this form)

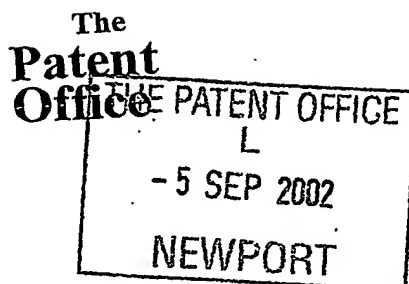

05SEP02 E746056-1 D02879
P01/7700 0.00-0220613.4

The Patent Office
Cardiff Road
Newport
Gwent NP10 8QQ

1/77

Your reference

PHGB 020147

Patent application number
(The Patent Office will fill in this part)

2002 SEP 5 0

0220613.4

3. Full name, address and postcode of the or of
each applicant (underline all surnames)

07419294001
Patents ADP Number (if you know it)

KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS
0682848700

If the applicant is a corporate body, give the
country/state of its incorporation

THE NETHERLANDS

4. Title of the invention

ELECTROLUMINESCENT DISPLAY DEVICES

5. Name of your agent (if you have one)
"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Patents ADP number (if you know it)

PAUL LEWIS WILLIAMSON
Philips Intellectual Property and Standards
Cross Oak Lane
Redhill
Surrey
RH1 5HA
974790007

07163322003

6. If you are declaring priority from one or more
earlier patent applications, give the country
and the date of filing of the or of each of these
earlier applications and (if you know it) the or
each application number

Country

Priority Application number
(if you know it)

Date of filing
(day/month/year)

7. If this application is divided or otherwise
derived from an earlier UK application, give
the number and the filing date of the earlier
application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to
grant of a patent required in support of this
request? (Answer "Yes" if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an
applicant, or
c) any named applicant is a corporate body.

YES

Patents form

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	
Claims(s)	10
Abstract	3
Drawings	1
	3

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right
to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and
search (*Patents Form 9/77*)

Request for substantive examination
(*Patents Form 10/77*)

Any other documents

(*Please specify*)

1.

I/We request the grant of a patent on the basis of this application.

Signature

Date

4/9/02

2. Name and daytime telephone number of
person to contact in the United Kingdom

01293 815280

(P. L. WILLIAMSON)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered "Yes" *Patents Form 7/77* will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

ELECTROLUMINESCENT DISPLAY DEVICES

5 This invention relates to electroluminescent display devices, particularly active matrix display devices having thin film switching transistors associated with each pixel.

Matrix display devices employing electroluminescent, light-emitting, display elements are well known. The display elements may comprise organic
10 thin film electroluminescent elements, for example using polymer materials, or else light emitting diodes (LEDs) using traditional III-V semiconductor compounds. Recent developments in organic electroluminescent materials, particularly polymer materials, have demonstrated their ability to be used practically for video display devices. These materials typically comprise one or
15 more layers of a semiconducting conjugated polymer sandwiched between a pair of electrodes, one of which is transparent and the other of which is of a material suitable for injecting holes or electrons into the polymer layer. An example of such is described in an article by D. Braun and A.J.Heeger in Applied Physics Letters 58(18) p.p. 1982-1984 (6 May 1991).

20 The polymer material can be fabricated using a PVD process, or simply by a spin coating technique using a solution of a soluble conjugated polymer. Ink-jet printing may also be used. Organic electroluminescent materials exhibit diode-like I-V properties, so that they are capable of providing both a display function and a switching function, and can therefore be used in passive type
25 displays. Alternatively, these materials may be used for active matrix display devices, with each pixel comprising a display element and a switching device for controlling the current through the display element.

Display devices of this type have current-addressed display elements, so that a conventional, analogue drive scheme involves supplying a
30 controllable current to the display element. It is known to provide a current source transistor as part of the pixel configuration, with the gate voltage supplied to the current source transistor determining the current through the

display element. A storage capacitor holds the gate voltage after the addressing phase.

Figure 1 shows a known pixel circuit for an active matrix addressed electroluminescent display device. The display device comprises a panel having a row and column matrix array of regularly-spaced pixels, denoted by the blocks 1 and comprising electroluminescent display elements 2 together with associated switching means, located at the intersections between crossing sets of row (selection) and column (data) address conductors 4 and 6. Only a few pixels are shown in the Figure for simplicity. In practice there may be several hundred or more rows and columns of pixels. The pixels 1 are addressed via the sets of row and column address conductors by a peripheral drive circuit comprising a row, scanning, driver circuit 8 and a column, data, driver circuit 9 connected to the ends of the respective sets of conductors.

The electroluminescent display element 2 comprises an organic light emitting diode, represented here as a diode element (LED) and comprising a pair of electrodes between which one or more active layers of organic electroluminescent material is sandwiched. The display elements of the array are carried together with the associated active matrix circuitry on one side of an insulating support. Either the cathodes or the anodes of the display elements are formed of transparent conductive material. For downward emitting arrangements, the support is of transparent material such as glass and the electrodes of the display elements 2 closest to the substrate may consist of a transparent conductive material such as ITO so that light generated by the electroluminescent layer is transmitted through these electrodes and the support so as to be visible to a viewer at the other side of the support. Typically, the thickness of the organic electroluminescent material layer is between 100 nm and 200nm. Typical examples of suitable organic electroluminescent materials which can be used for the elements 2 are known and described in EP-A-0 717446. Conjugated polymer materials as described in WO96/36959 can also be used.

For upward emitting arrangements, the substrate can be opaque or coloured.

Figure 2 shows in simplified schematic form a known pixel and drive circuitry arrangement for providing voltage-addressed operation. Each pixel 1 comprises the EL display element 2 and associated driver circuitry. The driver circuitry has an address transistor 16 which is turned on by a row address pulse on the row conductor 4. When the address transistor 16 is turned on, a voltage on the column conductor 6 can pass to the remainder of the pixel. In particular, the address transistor 16 supplies the column conductor voltage to a current source 20, which comprises a drive transistor 22 and a storage capacitor 24. The column voltage is provided to the gate of the drive transistor 22, and the gate is held at this voltage by the storage capacitor 24 even after the row address pulse has ended. The drive transistor 22 draws a current from the power supply line 26.

The drive transistor 22 in this circuit is implemented as a PMOS TFT, so that the storage capacitor 24 holds the gate-source voltage fixed. This results in a fixed source-drain current through the transistor, which therefore provides the desired current source operation of the pixel.

The above basic pixel circuit is a voltage-addressed pixel, and there are also current-addressed pixels which sample a drive current. However, all pixel configurations require current to be supplied to each pixel.

In a conventional pixel configuration, the power supply line 26 is a row conductor, and is typically long and narrow. The displays are typically backward-emitting, through the substrate carrying the active matrix circuitry. This is the preferred arrangement because the desired cathode material of the EL display element is opaque, so that the emission is from the anode side of the EL diode, and furthermore it is not desirable to place this preferred cathode material against the active matrix circuitry. Metal row conductors are formed, and for backward emitting displays they need to occupy the space between display areas, as they are opaque. For example, in a 12.5cm (diameter) display, which is suitable for portable products, the row conductor may be approximately 11cm long and 20 μ m wide. For a typical metal sheet resistance of 0.2 Ω /square, this gives a line resistance for a metal row conductor of 1.1k Ω . A bright pixel may draw around 8 μ A, and the current drawn is distributed along

the row. A row of 1920 pixels (640 x 3 colours) can experience a voltage drop of around 9 volts. This can be reduced by a factor of 4 by drawing current

from both ends of the row, and further still by improvements in efficiency of the EL materials. Nevertheless significant voltage drops are still present. This problem is worsened for larger displays, even if the total line resistance can be kept the same. This is because there are more pixels per row, or alternatively larger pixels if the resolution is the same. The voltage variations along the power supply line alter the gate-source voltage on the drive transistors, and thereby affect the brightness of the display, in particular causing dimming in the center of the display (assuming the rows are sourced from both ends). Furthermore, as the currents drawn by the pixels in the row are image-dependent, it is difficult to correct the pixel drive levels by data correction techniques.

ITO is used to form the common electrode in conventional displays, and has a typical sheet resistance of $20\Omega/\text{square}$. This increased sheet resistance makes ITO unsuitable for row conductors.

According to the invention, there is provided an active matrix electroluminescent display device comprising an array of display pixels, each pixel comprising:

an electroluminescent display element; and

active matrix circuitry including a drive transistor for driving a current through the display element;

wherein the drive transistor and the display element are connected in series between a power line for supplying or drawing a controllable current to or from the display element and a common potential line, and

wherein the power line and the common potential line each comprise a sheet electrode shared between all pixels of the array.

In this arrangement, sheet electrodes are used both for the current supply to the EL display element and the current sink. The power supply line is thus a shared sheet electrode instead of the conventional row electrode.

This reduces considerably the line resistance. For example, if the aspect ratio

of the sheet electrode power line is 1:1 (square) the line resistance is simply equal to the resistance per square of the material, for example 0.2Ω typically for metals. If the sheet is connected around the entire periphery, the line resistance is lower.

5 The device comprises a substrate, and the active matrix circuitry may overlie the substrate with an electroluminescent layer overlying the active matrix circuitry.

10 The display may be backward emitting through the substrate, so that conventional materials may be used in the manufacture of the device. The power line may then comprise an ITO sheet between the substrate and the active matrix circuitry. This provides a transparent layer, and the thickness can be selected to provide the desired resistance.

15 In this embodiment, an insulating layer is provided between the ITO sheet and the active matrix circuitry, with contact portions provided through the insulating layer. This provides the contact from the power line (sheet) to each pixel.

20 The display may instead be upward emitting away from the substrate, and materials have been developed which enable the EL display element cathode to overlie the active matrix circuitry, with light output from the anode away from the substrate. In this case, the power line comprises a metal sheet between the substrate and the active matrix circuitry.

 In this case, the common potential line needs to be transparent, and thus comprises an ITO layer forming the anodes of the EL display elements, and overlying the electroluminescent layer.

25 In these examples, one of the common potential line and the power supply line needs to be transparent (as they are on opposite sides of the EL material layer), and this will normally result in the use of ITO. This has a high resistance and it would be preferable to provide metallic electrodes for both current carrying lines.

30 Therefore, in another example, a second metal layer is provided between the substrate and the active matrix layer, isolated from the first metal layer, and wherein the second metal layer is connected to the common

potential line. In this way, the common potential line and the power supply line are connected to metal sheet layers.

The common potential line may comprise an ITO layer forming the anodes of the EL display elements, and overlying the electroluminescent layer, and the second metal layer contacts the common potential line with contact portions extending through the active matrix circuitry. These contact portions also extend through openings in the metal sheet.

The invention will now be described by way of example with reference to the accompanying drawings, in which:

Figure 1 shows a known EL display device;

Figure 2 is a simplified schematic diagram of a known pixel circuit for current-addressing the EL display pixel;

Figure 3 shows a simplified schematic diagram of a pixel circuit of the invention;

Figure 4 shows a first example of display device according to the invention;

Figure 5 shows a second example of display device according to the invention; and

Figure 6 shows a third example of display device according to the invention.

It should be noted that these figures are diagrammatic and not drawn to scale. Relative dimensions and proportions of parts of these figures have been shown exaggerated or reduced in size, for the sake of clarity and convenience in the drawings.

The invention provides a display in which the current is supplied and drained using substantially continuous sheets of conductive material. As shown schematically in Figure 3, the power supply line 26 is a sheet electrode, and it is shared between all pixels of the display. The term "line" will continue

to be used, although of course the conductor is a rectangular sheet. This power supply line is typically provided with a fixed voltage, for example 8 Volts.

The invention can be applied to any pixel design, not only the basic voltage-addressed pixel configuration of Figure 3. Indeed, any pixel which draws current from a power line can be modified to take advantage of the invention. There are many other types of pixel configuration, for example including additional circuit elements for aging compensation or for threshold voltage compensation, and there are also numerous current-addressed pixel designs. These all require current to be provided to the display elements of the pixels and can thereby benefit from the invention. These pixels may use NMOS, PMOS or CMOS technologies.

Figure 4 shows a first example of display device according to the invention.

The device comprises a substrate 30, active matrix circuitry 32 and an electroluminescent (EL) layer 34 over the active matrix circuitry 32. The substrate is typically glass. The active matrix circuitry is shown schematically as it may take various forms, as discussed above. The display is backward emitting through the substrate as shown by arrows 36, and the common potential line (the earth connection in Figure 3) is provided by a metal cathode layer 38 overlying the EL layer 34. The anodes of the individual pixels are defined by ITO pixel electrodes 40 which in practice form part of the active matrix circuitry 32.

The power supply line 26 is implemented as an ITO sheet 42 beneath the active matrix circuitry 32, in particular between the substrate 30 and the active matrix circuitry 32. This provides a transparent layer, and the thickness can be selected to provide the desired resistance. Furthermore, additional metal conductor portions may be provided outside the pixel areas to reduce the resistance further.

An insulating layer 44 is provided between the ITO sheet 42 and the active matrix circuitry, with contact portions 46 provided through the insulating layer 44. This provides the contact from the ITO power line to each pixel. The insulating layer can be any suitable transparent material, but is preferably

silicon oxide or silicon nitride. The contact portions 46 are typically metallic contacts.

The display may instead be upward emitting away from the substrate, and materials have been developed which enable the EL display element cathode to overlie the active matrix circuitry, with light output from the anode away from the substrate. Figure 5 shows an implementation of the invention for an upwardly emitting display. The same reference numerals are used as in Figure 4 for the same components.

In this case, the common potential line 38 is a transparent ITO layer and forms the anodes of the EL display elements. In this case, the pixel electrodes 40 can be metallic. The power supply line is in this case implemented as a metallic sheet conductor 42, again with contact portions 46 through an insulating layer 44 making contact with the individual pixel circuits of the active matrix circuitry 32.

In these two examples, one of the common potential line 38 and the power supply line 42 needs to be transparent, as they are on opposite sides of the EL material layer 34. The use of ITO results still in a high resistance, even if the resistance is reduced by providing a metallic overlay outside the pixel areas. The sheet conductors, both the power supply line and the common potential line, have to carry the currents from all pixels, rather than from only a row of pixels. The benefit of the reduction in resistance can be considered to be W/S where W is the row line width and S is the row spacing. In other words, for each row, the row conductor width is effectively increased from the previous row width to the full spacing between adjacent rows. This ratio may typically be around 0.2. Therefore, a benefit is only obtained if the materials needed for the shared conductor have resistance no worse than 5 times the metal resistance previously used for the metal row conductors.

In practice the use of ITO limits the benefit of the examples of Figures 4 and 5.

Figure 6 shows a modification to the example of Figure 5, and the same reference numerals are again used for the same components. A second metal layer 50 is provided between the substrate 30 and the active matrix layer 32,

isolated from the first metal layer 42 (which is the power supply line). The second metal layer 50 is connected to the ITO common potential line 38 overlying the EL material layer 34. In this way, the ITO common potential line is connected at each pixel location (or at least at regular intervals) to a metal sheet layer. The power supply line is also formed by a metal conductor 42 as in the example of Figure 5.

The second metal layer 50 is provided over the substrate 30 and a first insulator layer 52 overlies the second metal layer 50. The metal sheet 42 of the power supply line 26 overlies the first insulator layer 52. A second insulating layer 44 (corresponding to the insulating layer 44 in Figure 5) is provided between the metal sheet 42 and the active matrix circuitry 32, with the contact portions 46 through the second insulating layer 44.

The connections between the second metal layer 50 and the ITO common potential line 38 comprise contacts 60 extending through openings 62 in the metal sheet 42 and through the active matrix circuitry 32. The two metal sheets 42,50 should be as thick as possible and of as low resistivity metal as possible. The dielectric spacers (the insulating layers) are high integrity material. The contacts 60 may be metal only with a patterned contact pad beneath or above the ITO layer 38, as it is easier to pattern these contacts from metal rather than from ITO.

There will a number of possible materials for the conducting layer used to implement the invention. Where it is required to be transparent, ITO is an obvious candidate. Where it can be opaque, the layer may be any suitable metal layer, which may be formed as a foil or may be deposited by more conventional techniques.

The specific choice of materials to be used within the device structure has not been discussed in detail in this application, as the implementation of the invention will be routine for those skilled in the art. Indeed, the layers used conventionally in the manufacture of EL display devices can be employed, and the invention essentially requires row conductors to be replaced by a continuous layer (possibly with vias) and with interconnections provided to

individual pixels. The detailed processing steps will not therefore be discussed in detail.

Difficulties may arise in stepping the ITO layer 38 of Figure 6 through deep contact vias to the underlying metal. A strap contact may be used in this example, namely an additional metal layer above the ITO which passes through the via to the underlying metal electrode. The strap metal may be in contact with the ITO or separated from it by an insulator.

In the upward emitting examples of Figures 5 and 6, the substrate 30 may be a metal substrate which can then additionally function as one of the sheet metal contacts (for example avoiding the need for additional layers to define the contacts 42 or 50).

Various other modifications will be apparent to those skilled in the art.

CLAIMS

1. An active matrix electroluminescent display device comprising an array of display pixels, each pixel comprising:
 - 5 an electroluminescent display element; and
 - active matrix circuitry including a drive transistor for driving a current through the display element,
 - wherein the drive transistor and the display element are connected in series between a power line for supplying or drawing a controllable current to
 - 10 or from the display element and a common potential line, and
 - wherein the power line and the common potential line each comprise a sheet electrode shared between all pixels of the array.
2. A device as claimed in claim 1, comprising a substrate, the active matrix
- 15 circuitry overlying the substrate and an electroluminescent layer overlying the active matrix circuitry.
3. A device as claimed in claim 2, wherein the display is backward emitting through the substrate, and wherein the power line comprises an ITO sheet
- 20 between the substrate and the active matrix circuitry.
4. A device as claimed in claim 3, wherein an insulating layer is provided between the ITO sheet and the active matrix circuitry, contact portions being provided through the insulating layer.
- 25 5. A device as claimed in claim 2, wherein the display is upward emitting away from the substrate, and wherein the power line comprises a metal sheet between the substrate and the active matrix circuitry.
- 30 6. A device as claimed in claim 5, wherein the common potential line comprises an ITO layer forming the anodes of the EL display elements, and overlying the electroluminescent layer.

7. A device as claimed in claim 6, wherein an insulating layer is provided between the metal sheet and the active matrix circuitry, contact portions being provided through the insulating layer.

8. A device as claimed in claim 5, further comprising a second metal layer between the substrate and the active matrix layer, isolated from the first metal layer, and wherein the second metal layer is connected to the common potential line.

9. A device as claimed in claim 8, wherein the common potential line comprises an ITO layer forming the anodes of the EL display elements, and overlying the electroluminescent layer, and wherein the second metal layer contacts the common potential line with contact portions extending through the active matrix circuitry.

10. A device as claimed in claim 9, wherein the second metal layer overlies the substrate, a first insulator layer overlies the second metal layer, and the metal sheet overlies the first insulator layer.

11. A device as claimed in claim 10, wherein a second insulating layer is provided between the metal sheet and the active matrix circuitry, contact portions being provided through the second insulating layer.

12. A device as claimed in claim 10 or 11, wherein contact portions which connect the second metal layer to the common potential layer extend through openings in the metal sheet.

13. A device as claimed in any preceding claim, wherein the active matrix circuitry further comprises, for each pixel, an address transistor connected between a data-signal line and an input to the pixel.

14. A device as claimed in claim 13, wherein the active matrix circuitry further comprises, for each pixel, a storage capacitor connected between the power line and the gate of the drive transistor.


ABSTRACT

ELECTROLUMINESCENT DISPLAY DEVICES

5 In an active matrix electroluminescent display device, a drive transistor
(22) and the display element (2) are connected in series between a power line
(26) for supplying or drawing a controllable current to or from the display
element and a common potential line. The power line (26) and the common
potential line each comprise a sheet electrode shared between all pixels of the
10 array. In this arrangement, sheet electrodes are used both for the current
supply to the EL display element and the current sink. This reduces
considerably the line resistance.


[Fig. 3]

15

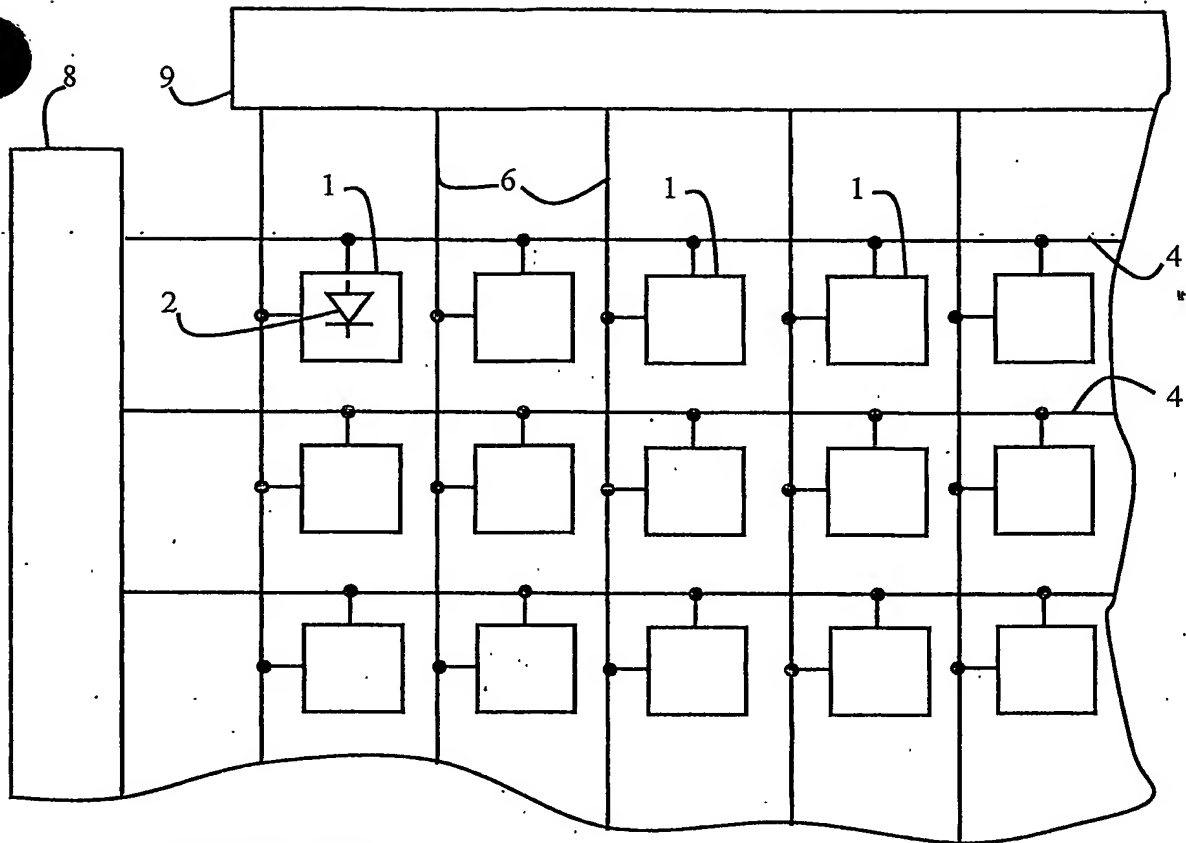

PRIOR ART

FIG. 1

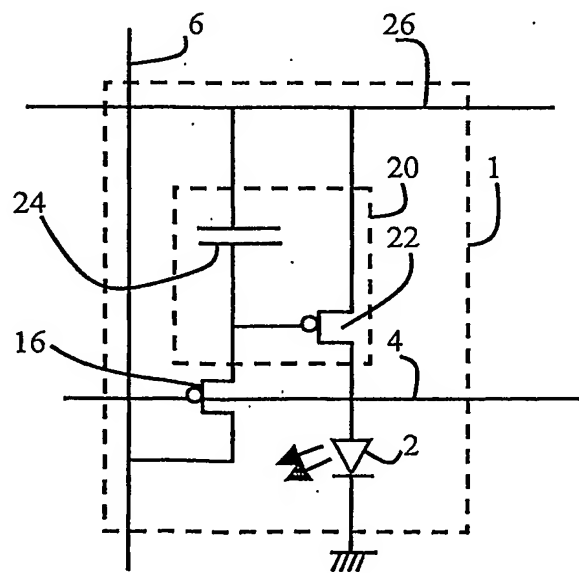

PRIOR ART

FIG. 2

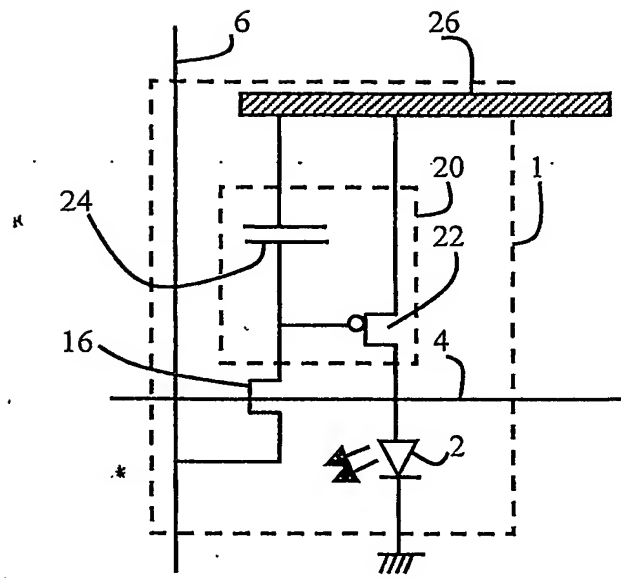


FIG. 3

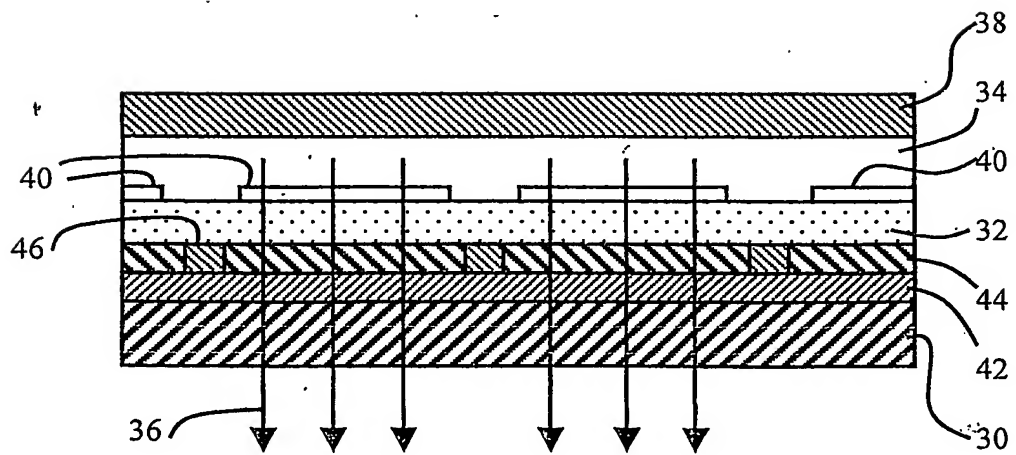


FIG. 4

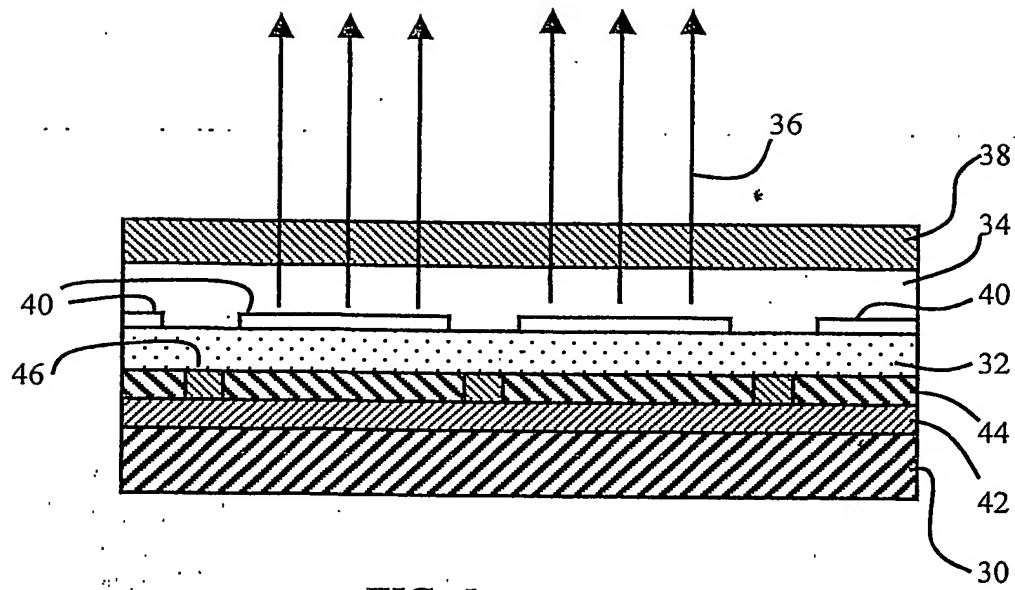


FIG. 5

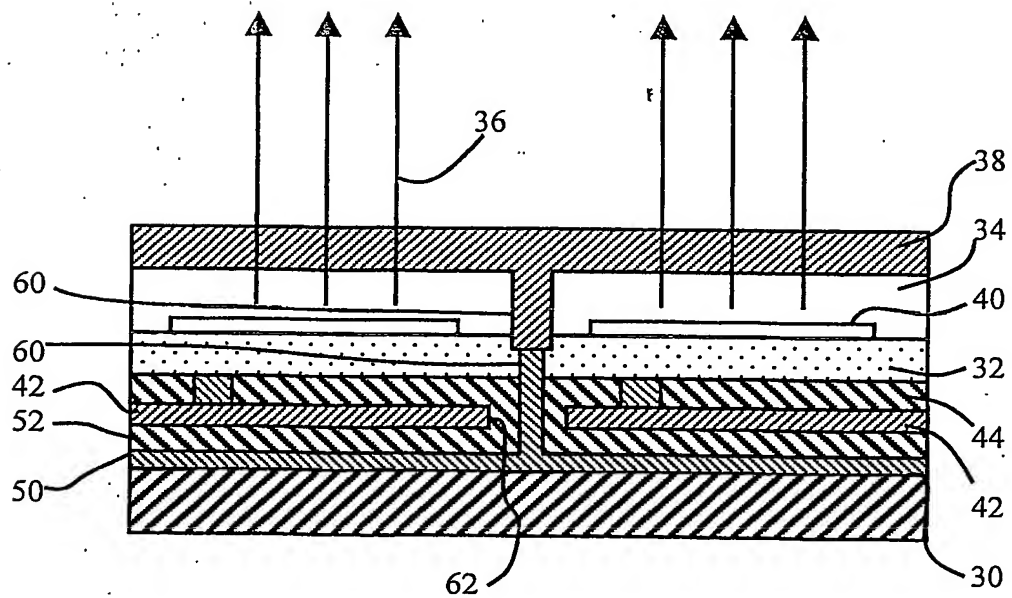


FIG. 6

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.